SPECIFICATIONS

DESCRIPTION:

Compact MR16 adjustable accent fixture with integral angled glare shield. Suitable for wet/damp/dry location installations.

MATERIAL:

Standard overall material is 6061 aluminum. HL-369 - Machined Aluminum (Standard) HL-369-2b - Machined Brass

FINISH:

- AA Anodized Satin Aluminum AP Powder Coat Aluminum BK Powder Coat Black

- BZ Powder Coat Bronze
- WT Powder Coat White
- N Natural, for Stainless Steel and Brass

HALOGEN LAMPING OPTION:

Lamp Type - 12V halogen MR16 lamp, bi-pin GX5.3 base, 50W max, not included (standard).

LED OPTIONS:

Integral high output LED, warm white 85 CRI (90 available) 2700K or 3000K Standard (4000K, 5000K, & 6000K available)

3LED - 3W LED - 180 lumens 8LED - 8W LED - 300 lumens 8LED-E - 8.4W LED - 565 lumens

OPTICS

- 3LED and 8LED:
- **SP** Spot, 12° **NF** Narrow Flood, 24° **FL** Flood, 36°
- 8LED-E:
- SP Spot 14° NF - Narrow Flood, 25°
- MF Medium Flood, 30° FL Flood, 40°

VOLTAGE:

12 - 12 VAC output transformer required, not included.

MOUNTING:

Fixture is designed with a 1/2-NPS adjustable mounting stem.

OPTIONS:

- Lenses/Louvers/Color Filters
 - LA-1 Hexcell Louver (Black)
 - LA-2 Prismatic lens
 - LA-3 Linear spread lens
 - LA-4 Soft focus lens (diffused)
 - LA-5 Moonlight lens
 - LA-6 Blue lens

See fixture accessories for more information.

SAMPLE ORDER SPECIFICATION: HL-369-BZ-12-LA-1

RATING: Wet/damp/dry location.



PROJECT:


NOTE:

TYPE:

APPROVED:

MADE IN THE USA

ORDER SPECIFICATION:

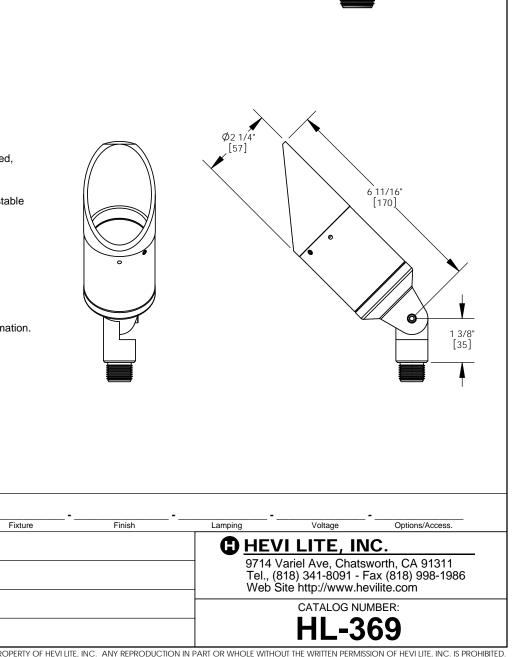

0