SPECIFICATIONS

DESCRIPTION:
Compact MR16 round step light, with machined protective grill. Suitable for wet/damp/dry location installations.

MATERIAL:
Standard overall material is 6061 aluminum.
HL-145 - Machined Aluminum

FINISH:
AA - Anodized Satin Aluminum
AP - Powder Coat Aluminum
BK - Powder Coat Black
BZ - Powder Coat Bronze
WT - Powder Coat White

HALOGEN LAMPING OPTION:
Lamp Type - 12V halogen MR16 lamp, bi-pin GX5.3 base, 50W max, not included (standard).

LED OPTIONS
Integral high output LED, warm white 85 CRI (3000K CCT) standard, others available.
3LED - 3W LED - 180 lumens
8LED - 8W LED - 300 lumens
8LED-E - 8.4W LED - 565 lumens

OPTICS
3LED and 8LED:
SP - Spot, 12°
NF - Narrow Flood, 24°
FL - Flood, 36°
8LED-E:
SP - Spot 14°
NF - Narrow Flood, 25°
MF - Medium Flood, 30°
FL - Flood, 40°

VOLTAGE:
12 - 12 VAC output transformer required, not included.

MOUNTING:
Fixture is equipped with a 4.75" mounting plate and (2) mounting screws. Mounts directly to standard electrical junction boxes (HL-198-JB) or with optional pour housing (HL-45PH).

OPTIONS:
Lenses - Standard lens is diffused with internal half shield for reduced lamp glare.
90 - Linear spread lens
91 - Solite lens
93 - Prismatic lens
98 - Internal half shield for above lenses
Mounting Accessories
HL-45PH - Aluminum Pour Housing
HL-198-JB - Steel Octagonal Box w/Mud Ring
See fixture accessories for more information.

RATING:
Wet/damp/dry location.

Intertek

MADE IN THE USA

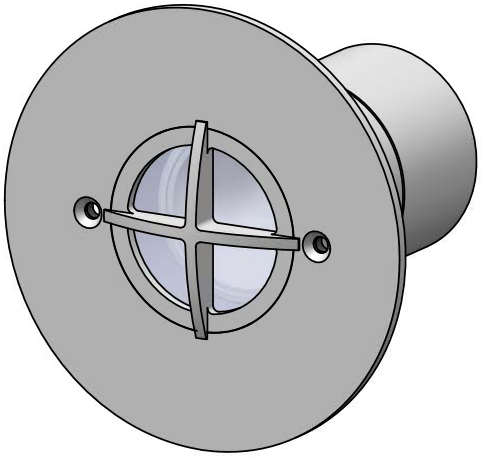

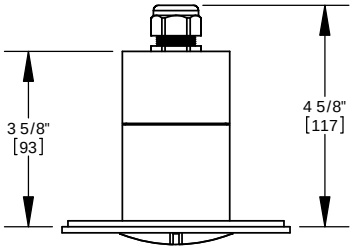

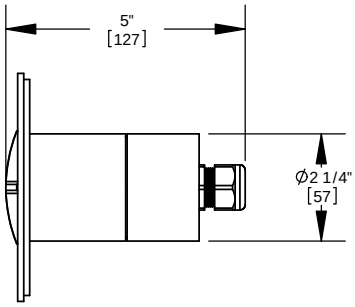

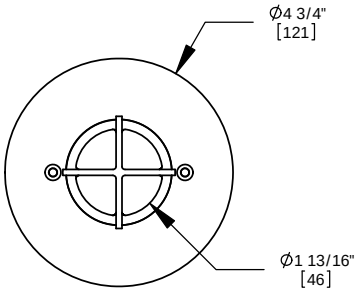

ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
Fixture | Finish | Lamping | Voltage | Options/Access.

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.
9714 Variel Ave, Chatsworth, CA 91311
Tel., (818) 341-8091 - Fax (818) 998-1986
Web Site http://www.hevilite.com

CATALOG NUMBER:
HL-145

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HEVI LITE, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HEVI LITE, INC. IS PROHIBITED.