

SPECIFICATIONS

DESCRIPTION:

Sleek square LED path light. Suitable for wet/damp/dry location installations.

MATERIAL:

Standard overall material is 6061 aluminum.

FINISH:

- AA - Anodized Satin Aluminum
- AP - Powder Coat Aluminum
- BK - Powder Coat Black
- BZ - Powder Coat Bronze
- WT - Powder Coat White

LED OPTIONS:

Integral high output LED, warm white (3000K CCT) standard, others available. LED is MLV dimmable.

- 1LED - 1W LED
- 3LED - 3W LED

VOLTAGE:

12 - 12 VAC output transformer required, not included.

MOUNTING:

Fixtures mount directly to standard Hevi Lite ground mounts with 1/2-NPS thread. Fixtures with stem extensions mount directly to wood or concrete surfaces. Stem extensions are equipped with wiring compartment. (1) opening for 1/2" conduit or 1/2-NPS mount and (4) 1/4" holes for concrete anchors.

- GM-1 - Composit mounting spike
- GM-2 - Cast mounting spike.
- GM-3 - Stainless steel triple prong spike.
- GM-4 - Stainless steel triple prong spike w/j-box
- GM-5 - ABS mounting spike w/ wiring compartment
- GM-6 - Cast mounting spike with wiring box
- GM-7 - Cork screw style mounting spike
- GM-8 - Cast in grade j-box
- GM-9 - Landscape power post

SIZES:

Standard fixture height is 12". Four standard stem extension available, custom lengths available upon request.

- 12 - 12" Overall Length
- 15 - 15" Overall Length
- 18 - 18" Overall Length
- 24 - 24" Overall Length
- 30 - 30" Overall Length


SAMPLE ORDER SPECIFICATION:

HL-6500-BZ-3LED-12-12

RATING:

Wet/damp/dry location.

MADE IN THE USA

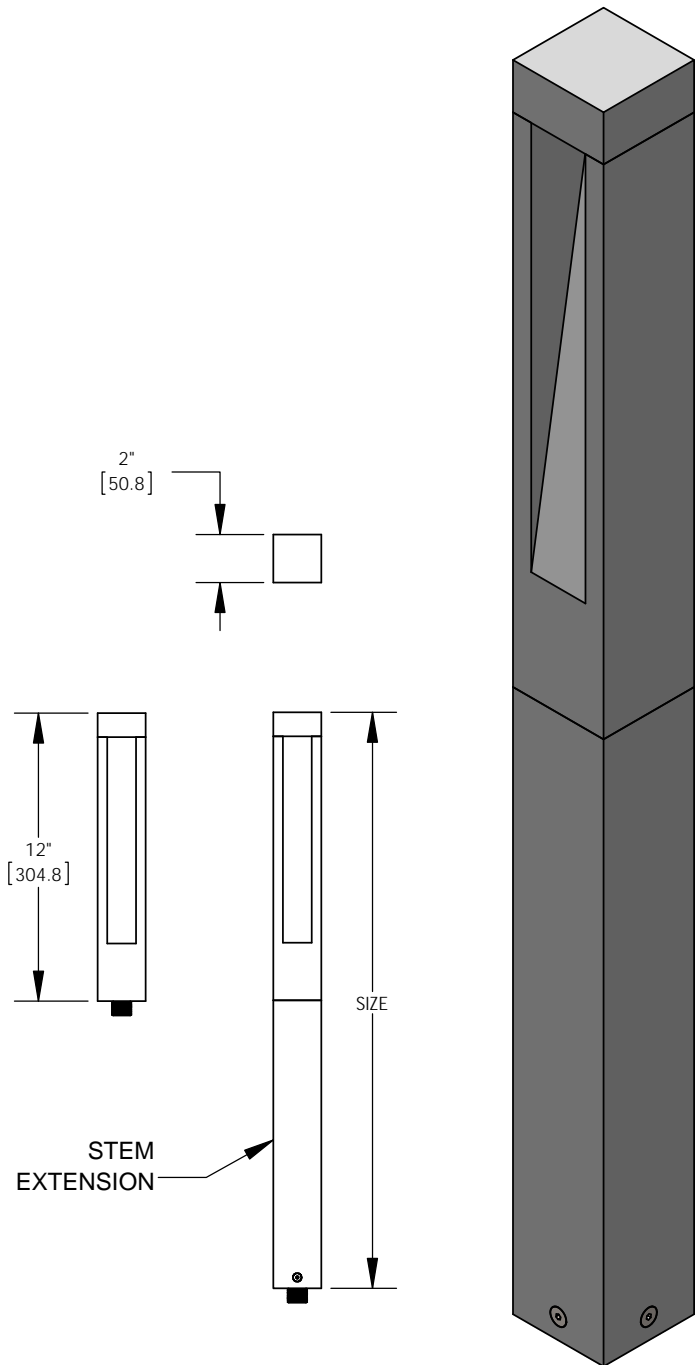

ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
Fixture Finish Optics Voltage Options/Access.

PROJECT:
 APPROVED:
 NOTE:
 TYPE:

HEVI LITE, INC.
 9714 Variel Ave, Chatsworth, CA 91311
 Tel., (818) 341-8091 - Fax (818) 998-1986
 Web Site <http://www.hevilite.com>

CATALOG NUMBER:
HL-6500