SPECIFICATIONS

DESCRIPTION:
Low voltage 50W direct burial transformer in a composite enclosure. Suitable for wet/damp/dry location installations.

MATERIAL:
Standard overall material is PVC.

VOLTAGE:
Input Voltage - 120 VAC - 1A max.
Output Voltage - 12 VAC - 5A max.
Internal Breaker - 5A
Frequency - 60 Hz
120 -120V

MOUNTING:
Box has no fixture hubs or mounting holes.

RATING:
Meets the UL standards for direct burial enclosures. UL 1598, the UL standard for safety for luminaires. UL 1838, the UL standard for low-voltage landscape lighting systems and components. Certified to CAN/CSA C22.2 No. 66 ETL listed.

Intertek

MADE IN THE USA

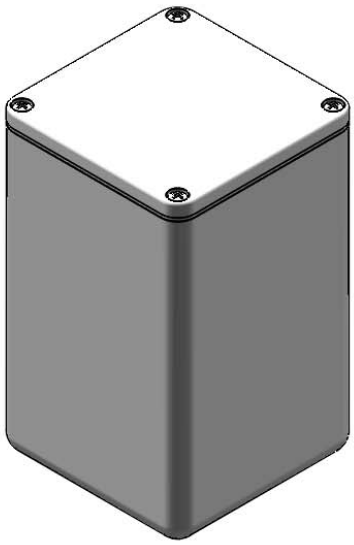





ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
Fixture | Finish | Lamping | Voltage | Options/Access.

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.
9714 Variel Ave, Chatsworth, CA 91311
Tel., (818) 341-8091 - Fax (818) 998-1986
Web Site http://www.hevilite.com

CATALOG NUMBER:

HLT-DB-50

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HEVI LITE, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HEVI LITE, INC. IS PROHIBITED.