

SPECIFICATIONS

DESCRIPTION:

Direct burial composite enclosure with (1) LED driver. Enclosure comes standard with junction compartment and anti-siphon barrier. Anti-Siphon chamber ensures no water can enter the main housing. Suitable for wet/damp/dry location installations.

MATERIAL:

Compression molded, fiberglass reinforced polyester composite housing. Brass hardware.

FINISH:

Dark Bronze, color impregnated composite.

ELECTRICAL:

Housing is prewired with high temperature wire. Silicone filled, waterproof wire nuts and potting compound are provided for installation.

COMPATIBLE FIXTURES

HL-920
HL-925

DRIVER:

Constant current LED driver.

- L30 - 350mA 16W driver
- L35 - 500mA 23W driver
- L40 - 700mA 32W driver
- L50 - 1050mA 34W driver

VOLTAGE:

Integral LED driver. Dimmable only in 120v

120-277 - 120-277 VAC - Leading edge/Trailing edge dimmable.

120-277-0-10 - 120-277 VAC - 0-10v dimming

MOUNTING:

Box has (1) 1/2-NPT fixture mount on cover, (1) 1/2-NPT and (2) 3/4-NPT conduit hubs.

SAMPLE ORDER SPECIFICATION:






HLD-CBB-L30-120-277

RATING:

Enclosure wet location rated.



MADE IN THE USA

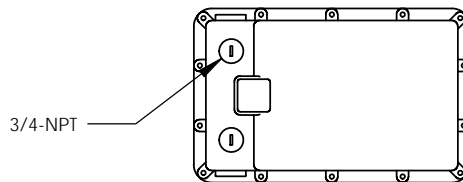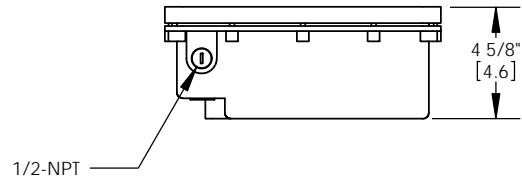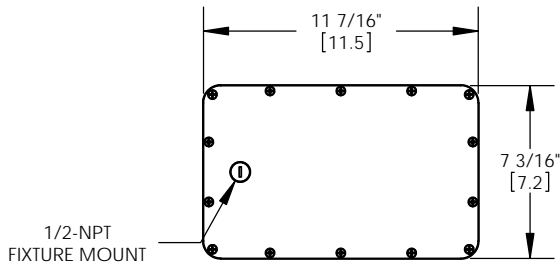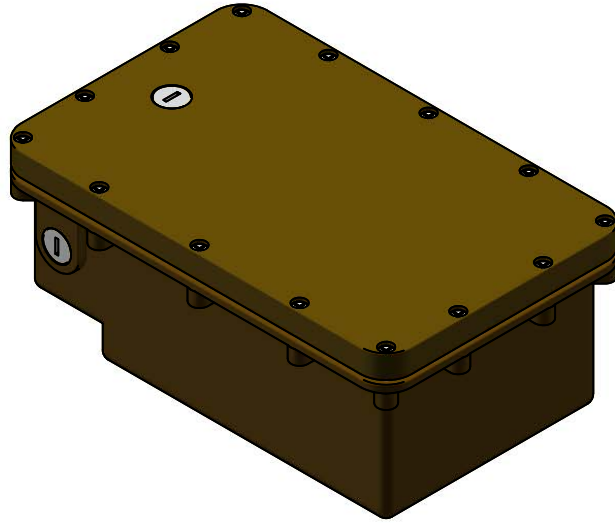

ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
Fixture Finish Lamping Voltage Options/Access.

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.
 9714 Variel Ave, Chatsworth, CA 91311
 Tel., (818) 341-8091 - Fax (818) 998-1986
 Web Site <http://www.hevilite.com>

CATALOG NUMBER:
HLD-CBB