

SPECIFICATIONS

DESCRIPTION:

High output LED adjustable accent fixture. Suitable for wet/damp/dry location installations.

MATERIAL:

Standard overall material is 6061 aluminum.

FINISH:

- AA - Anodized Satin Aluminum
- AP - Powder Coat Aluminum
- BK - Powder Coat Black
- BZ - Powder Coat Bronze
- WT - Powder Coat White

LED OPTIONS:

Integral high output Xicato LED module,
L30 - 5.4.W, 720 Lumens (3000K)
L40 - 11.4 W, 1275 Lumens (3000K)
 Color Temperature CCT
27 - 2700K CCT
30 - 3000K CCT
35 - 3500K CCT
40 - 4000K CCT

IES TM-30: Rf 78, Rg 101

Reflector, Field Replaceable

- NF - Narrow Flood, 20°
- FL - Flood, 40°
- WFL - Wide Flood, 60°

VOLTAGE:

Requires remote LED driver. Leading edge/trailing edge dimmable constant current remote LED Driver included. Dimmable only in 120V. See driver options.
120-277 - 120-277V LED driver

DRIVER OPTIONS:

Fixture includes HL-RD remote LED driver enclosure (3R rated stainless steel enclosure) standard. Driver options available in place of HL-RD for direct burial, surface, ground and wall mounting available.
H-POD-LED-L** - Remote direct burial driver.
HLD-CBB-L** - Composite burial box for driver w/fixture mount.
SMED-L** - Surface mount driver canopy.
WMED-L** - Wall mount driver canopy.

MOUNTING:

Fixture is designed with a 1/2"-NPS adjustable mounting stem.



OPTIONS:

- Glare shield
 - GL-920 - Angled, aluminum
 - GL-921 - Straight, aluminum
 - Lenses/Louvers/Color Filters
 - LA-1-920 - Hexcell Louver (Black)
 - LA-2-920 - Prismatic lens
 - LA-3-920 - Linear spread lens
 - LA-4-920 - Soft focus lens (diffused)
 - LA-5-920 - Moonlight lens
 - LA-6-920 - Blue lens
- See fixture accessories for more information.

RATING:

Wet/damp/dry location.

MADE IN THE USA

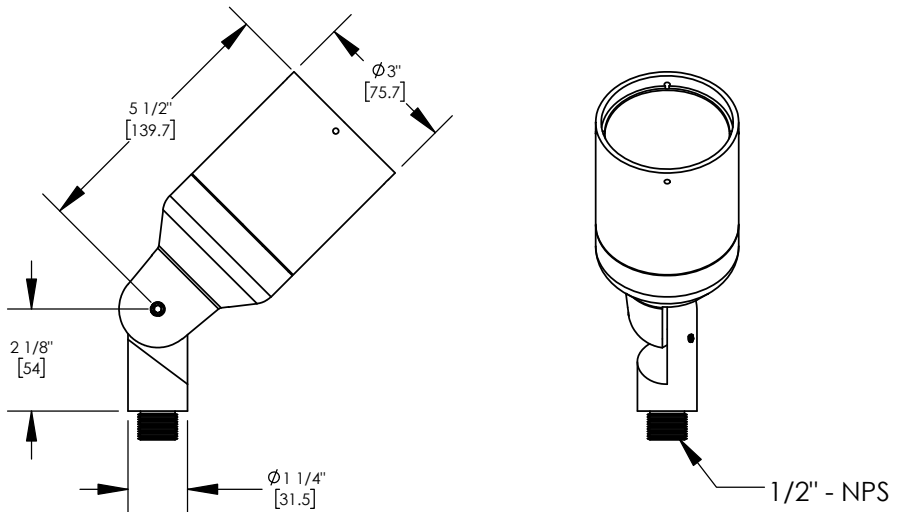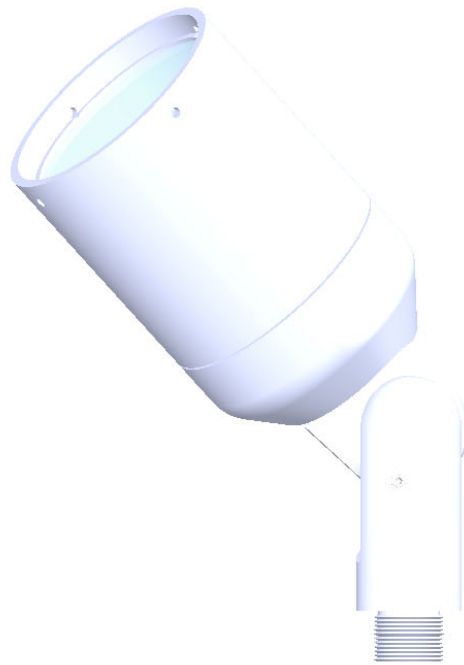

PROJECT:
APPROVED:
NOTE:
TYPE:

HEVI LITE, INC.
 9714 Variel Ave, Chatsworth, CA 91311
 Tel., (818) 341-8091 - Fax (818) 998-1986
 Web Site <http://www.hevilite.com>

CATALOG NUMBER:
HL-918