

SPECIFICATIONS

DESCRIPTION:

Small reliable LED electronic hardwire transformers for use with low voltage lighting fixtures. Moisture and shock resistance. Emits no audible noise, low harmonic distortion, high power factor.

MODELS AVAILABLE:

HLT-15E-LED - 15W
HLT-30E-LED - 30W
HLT-60E-LED - 60W

DIMMING:

Standard - ELV phase dimming.
0-10 - 0-10V dimming

VOLTAGE:

All transformers include electrical short circuit and overload protection with automatic reset (resets after short is corrected).
120 - 120 VAC input/11.7 VAC output
277 - 277 VAC input/11.7 VAC output

MOUNTING:

Requires mounting box, not included.
 Note: Maximum 5 units on a single circuit.

SAMPLE ORDER SPECIFICATION:





HLT-40E-LED-120

RATING:

UL and C-UL Recognized.

Max remote distance 15 feet.

Max 5 transformers on single 120V-277V circuit.

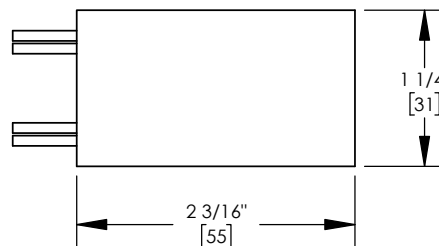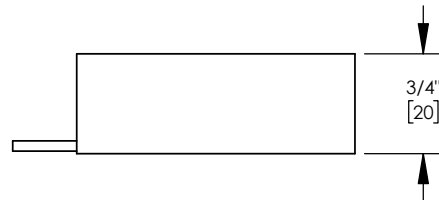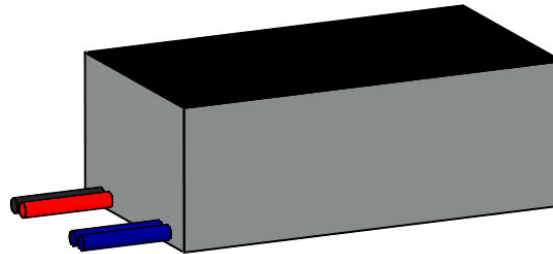

ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
 Fixture Finish Lamping Voltage Options/Access.

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.

9714 Variel Ave, Chatsworth, CA 91311
 Tel., (818) 341-8091 - Fax (818) 998-1986
 Web Site <http://www.hevilite.com>

CATALOG NUMBER:

HLT-XXE-LED