

SPECIFICATIONS

DESCRIPTION:

High output LED adjustable accent fixture.
Suitable for wet/damp/dry location installations.

MATERIAL:

Standard overall material is 6061 aluminum.
HL-931 - Machined Aluminum

FINISH:

AA - Anodized Satin Aluminum
AP - Powder Coat Aluminum
BK - Powder Coat Black
BZ - Powder Coat Bronze
WT - Powder Coat White

LED OPTIONS:

Integral high output Xicato LED module.
LED Output

L30 - 8.0W, 350mA, 750 Lumen
L35 - 11.6W, 500mA, 1000 Lumen
L40 - 16.5W, 700mA, 1300 Lumen

Color Temperature CCT

27 - 2700K CCT
30 - 3000K CCT
35 - 3500K CCT
40 - 4000K CCT

Reflector, Field Replaceable

NF - Narrow Flood, 24°
FL - Flood, 40°
WFL - Wide Flood, 60°

VOLTAGE:

Integral LED driver, phase dimming standard
@120V

0-10 - 0-10V dimming.
120-277 - 120-277 VAC LED driver.

MOUNTING:

Fixture is designed with a 1/2-NPS adjustable mounting stem.

OPTIONS:

Glare shield

GL-920 - Angled, aluminum

GL-921 - Straight, aluminum

GL-922 - Align Angle, aluminum

Lenses/Louvers/Color Filters

LA-1-920 - Hexcell Louver (Black)

LA-2-920 - Prismatic lens

LA-3-920 - Linear spread lens

LA-4-920 - Soft focus lens (diffused)

LA-5-920 - Moonlight lens

LA-6-920 - Blue lens

See fixture accessories for more information.

SAMPLE ORDER SPECIFICATION:



HL-931-BZ-L40-30-FL-120-277

RATING:

Wet/damp/dry location.



MADE IN THE USA

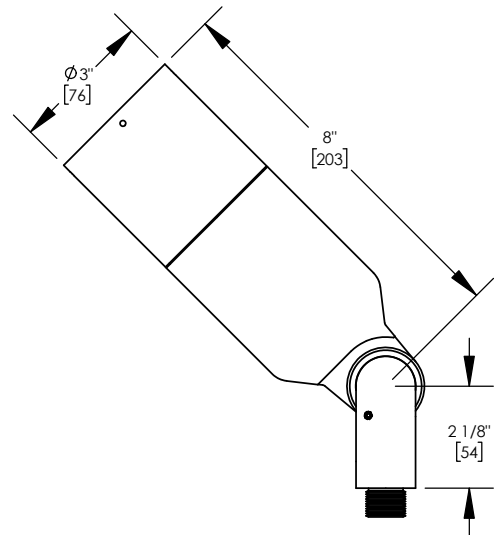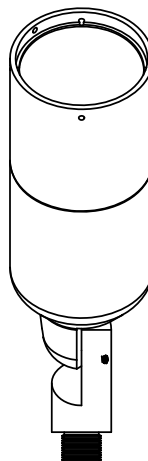

ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
Fixture Finish Lamping Voltage Options/Access.

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.

9714 Variel Ave, Chatsworth, CA 91311
Tel., (818) 341-8091 - Fax (818) 998-1986
Web Site <http://www.hevilite.com>

CATALOG NUMBER:

HL-931